

Decision-Theoretic Troubleshooting: Hardness of Approximation

Václav Lín

Abstract

Decision-theoretic troubleshooting is one of the application areas of Bayesian networks. Given a probabilistic model of a malfunctioning man-made device, the task is to construct a repair strategy with minimal expected cost. The problem has received considerable attention over the past two decades. Efficient solution algorithms have been found for simple cases, whereas other variants have been proven *NP*-complete. We study several variants of the problem found in the literature, and prove that computing *approximate* troubleshooting strategies is *NP*-hard. In the proofs, we exploit a close connection to set-covering problems.

1 Introduction

In decision-theoretic troubleshooting [Breese and Heckerman, 1996], we are given a probabilistic model of a man-made device. The model describes faults, repair actions and diagnostic actions addressing the faults. Knowing that the modeled device is in a faulty state, the task is to find the most cost-efficient strategy for fixing the device with available repair and diagnostic actions. This is a natural optimization problem that has been studied independently in various contexts since the early days of computing [Johnson, 1956, Bellman, 1957, Gluss, 1959].

Troubleshooting has become one of the application areas of Bayesian networks [Breese and Heckerman, 1996, Jensen et al., 2001] with interesting algorithmic problems and results [Ottosen, 2012]. The troubleshooting problem is known to be solvable in polynomial time under quite restrictive assumptions (to be discussed in Section 2). When the assumptions are relaxed, the problem is *NP*-hard [Vomlelová, 2003]. Efficient heuristics exist that yield close-to-optimal results in practice [Jensen et al., 2001, Gökçay and Bilgiç, 2002]. Search algorithms for computing optimal troubleshooting strategies are described in [Vomlelová and Vomlel, 2003]. However, we provide negative results showing that approximating the optimal solutions is in general a hard problem.

Our Contribution We solve an open problem suggested by Ottosen [2012] – we show that troubleshooting with cost clusters (to be defined below) forming an acyclic directed graph is *NP*-complete, and it is *NP*-hard to approximate. We improve upon known *NP*-completeness results [Vomlelová, 2003] by showing hardness of approximation for troubleshooting scenarios containing multiple dependent faults, dependent actions or questions.

Organization of the paper In Section 2, we overview the various setups of the troubleshooting problem. Precise statements of our results are in Section 3.1. The proofs are presented in Section 3.2. The proofs utilize reductions from the *Min-sum set cover* problem [Feige et al., 2004] and the *Decision tree* problem [Garey and Johnson, 1979, Chakaravarthy et al., 2011].

2 Troubleshooting Models and Strategies

Bayesian networks for troubleshooting [Breese and Heckerman, 1996, Jensen et al., 2001] contain variables representing

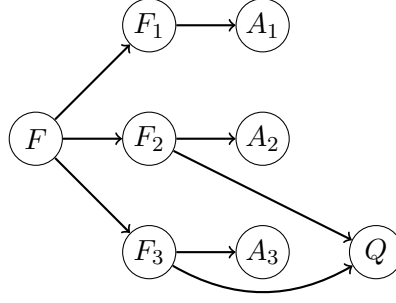


Figure 1: Bayesian network for a troubleshooting model with single fault assumption and actions conditionally independent given the faults. There are three faults – F_1 , F_2 , F_3 . To enforce the single fault assumption, we use a fault variable F with states $\{1, 2, 3\}$ and define the probability tables for all F_i so that $F_i = 1$ if and only if $F = i$. There are actions A_1 , A_2 , A_3 , each addressing one of the faults. There is a question Q that can be used to discriminate between F_2 and F_3 .

- *faults*,
- repair actions, called simply *actions*, and
- diagnostic actions, called *questions*.

Actions have only two possible outcomes – either the system is fixed after the action has been performed, or it remains in a faulty state. We assume that by performing the actions, we cannot introduce any new faults, and we know the outcome of any action immediately after its execution. *Questions* do not alter the state of the system, but may give useful information to direct the troubleshooting process.

Each action or question has an associated *cost*. These costs do not change over time except when stated otherwise. The actions and questions are *idempotent* [Ottosen, 2012] in the sense that repeating a failed action does not fix the system, and repeating a question provides the same answer as the first time that the question was asked.

Under the *single fault assumption*, there can be at most one fault present in the system at any moment of time. A simple troubleshooting model with the single fault assumption is shown in Figure 1.

Troubleshooting strategy Vomlelová and Vomlel [2003] is a policy governing the troubleshooting process. An example of a troubleshooting strategy is in Figure 2. In general, troubleshooting strategy is a rooted directed tree with internal nodes labeled by actions and questions. Edges are labeled by outcomes of the actions and questions. Each path from the root of the strategy to one of the leaves corresponds to a possible troubleshooting session starting in the root and terminating in the leaf. *Failure nodes* are all the leaf nodes for which the corresponding troubleshooting session fails to fix the system. For a strategy $\mathbf{S}$, we use this notation:

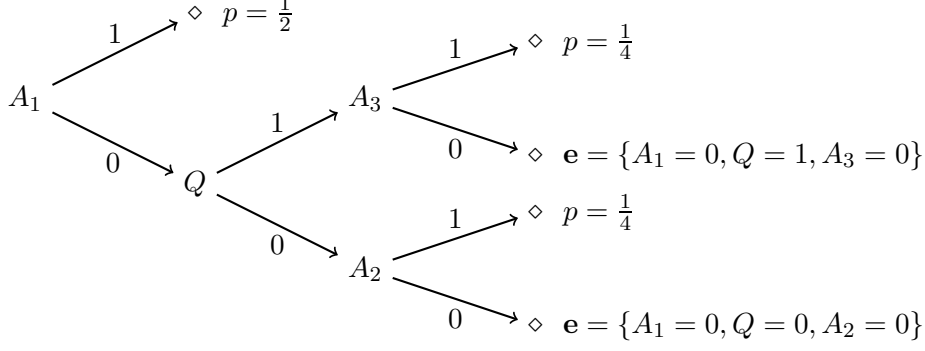


Figure 2: A troubleshooting strategy for the model in Figure 1. It contains actions A_1 , A_2 , A_3 and a question Q . Nodes are labeled by actions and questions; edges are labeled by action or question outcomes. According to this strategy, each troubleshooting session will begin with action A_1 . If it fails ($A_1 = 0$), we use question Q . Depending on the outcome of Q , we either perform A_2 or A_3 . Assume that all the A_i 's and Q have unit cost, and the fault probabilities are $\mathcal{P}(F = 1) = \frac{1}{2}$, $\mathcal{P}(F = 2) = \frac{1}{4}$, $\mathcal{P}(F = 3) = \frac{1}{4}$. Further, assume that each action A_i solves the respective fault F_i with certainty. Then, summing over the terminal nodes with positive probability (the p 's in the figure), we get $ECR = \frac{1}{2} \cdot 1 + \frac{1}{4} \cdot 3 + \frac{1}{4} \cdot 3 = 2$. We display evidence $\mathbf{e}$ for two of the failure nodes.

$\mathcal{L}(\mathbf{S})$	The set of leafs, also called <i>terminal nodes</i> .
$\mathcal{L}^-(\mathbf{S})$	The set of failure nodes, $\mathcal{L}^-(\mathbf{S}) \subset \mathcal{L}(\mathbf{S})$.
$\mathbf{e}_\ell$	The <i>evidence</i> (the outcomes of all actions and questions) compiled along the path from the root ϑ of strategy $\mathbf{S}$ to node ℓ . Let $E(\vartheta, \ell)$ be the set of all the edges constituting the path from ϑ to ℓ . Then $\mathbf{e}_\ell = \bigcup_{e \in E(\vartheta, \ell)} \text{outcome}(e)$. An example is in Figure 2.
$\mathcal{P}(\mathbf{e}_\ell)$	The probability of reaching node ℓ .
$t(\ell)$	The cost of performing all the actions and questions on the path from the root of $\mathbf{S}$ to node ℓ .
c_P	The penalty for not fixing the system.

Since we assume that each repair action has only two possible outcomes, “1” (system fixed) and “0” (system still in faulty state), the outdegree of nodes labeled by repair actions is exactly two, with the edge labeled by “1” leading always to a terminal node in $\mathcal{L}(\mathbf{S}) \setminus \mathcal{L}^-(\mathbf{S})$. The goal is to construct a strategy $\mathbf{S}$ minimizing the *expected cost of repair*

$$ECR(\mathbf{S}) = \sum_{\ell \in \mathcal{L}(\mathbf{S})} \mathcal{P}(\mathbf{e}_\ell) \cdot t(\ell) + \sum_{\ell \in \mathcal{L}^-(\mathbf{S})} \mathcal{P}(\mathbf{e}_\ell) \cdot c_P. \quad (1)$$

Figure 2 gives an example of ECR evaluation.

2.1 Troubleshooting without Questions

When there are no questions, the troubleshooting strategy is just a sequence of repair actions $A_1, \dots, A_n$. The actions are performed in order and the troubleshooting session continues until the fault is fixed or all the actions have been used. In this paper, we assume the following.

Assumption 1 The available actions $A_1, \dots, A_n$ are sufficient to fix the fault, and we never

terminate the troubleshooting process before the system is fixed.¹

With Assumption 1, we can ignore the penalty term of (1), and the *ECR* of a sequence $[A_1, \dots, A_n]$ can be computed by

$$ECR(A_1, \dots, A_n) = \sum_{i=1}^n \mathcal{P}\left(\bigcup_{j<i} \{A_j = 0\} \cup \{A_i = 1\}\right) \cdot \sum_{j \leq i} c(A_j), \quad (2)$$

that is, we multiply the cost of the first i actions by the probability of fixing the fault with the i -th action.

2.1.1 Basic Troubleshooting

Finding optimal strategies in polynomial time is known to be possible under quite restrictive assumptions [Jensen et al., 2001]:

Assumption 2 There is exactly one fault present in the system (the *single fault assumption*).

Assumption 3 The actions are conditionally independent given the faults, and each action addresses exactly one fault.

Assumption 4 The action costs are constant over time.

Assumption 5 There are no questions.

Scenarios conforming to these assumptions are called *basic troubleshooting*. Optimal strategy for a basic troubleshooting scenario is computed by ordering the actions so that the sequence of ratios $\frac{\mathcal{P}(A_i=1)}{c(A_i)}$ is non-increasing.² Due to the single fault assumption, Formula (2) becomes

$$ECR(A_1, \dots, A_n) = \sum_{i=1}^n \mathcal{P}(A_i = 1) \cdot \sum_{j \leq i} c(A_j) .$$

2.1.2 Cost Clusters

The requirement of constant action costs, mentioned in Section 2.1.1, can be violated when some of the troubleshooting actions require common initialization or preparatory work. For example, it is often necessary to disassemble the machine to perform certain actions when troubleshooting a large piece of machinery. To model such situations, Langseth and Jensen [2001] proposed an extension of the basic troubleshooting model, where the set of actions is partitioned into disjoint subsets, called *cost clusters*. To access actions within a cluster $\mathcal{K}_i$, we have to pay additional cost to *open* the cluster, $c(\mathcal{K}_i)$. Once a cluster $\mathcal{K}_i$ is open, we can use actions from $\mathcal{K}_i$ at any time, possibly mixed with actions from other open clusters. Ottosen and Jensen [2010] have generalized the cost cluster scenario by allowing the cost clusters to form a tree and gave a polynomial-time algorithm for finding optimal troubleshooting sequences. Ottosen [2012] suggested a further generalization of the problem, where the cost clusters are allowed to form an acyclic directed graph (DAG). A simple model with cost cluster graph is shown in Figure 3. We study models with cost cluster DAGs in Section 3.

The cost cluster scenarios discussed so far differ from the scenario where there are cost clusters “*without inside information*” [Langseth and Jensen, 2001]. Without inside information,

¹ Note that this is a simplification. In the real life, we quite often decide to buy a new device before we have tried everything possible to fix the old one.

²This simple observation goes back to Bellman [1957] and Smith [1956].

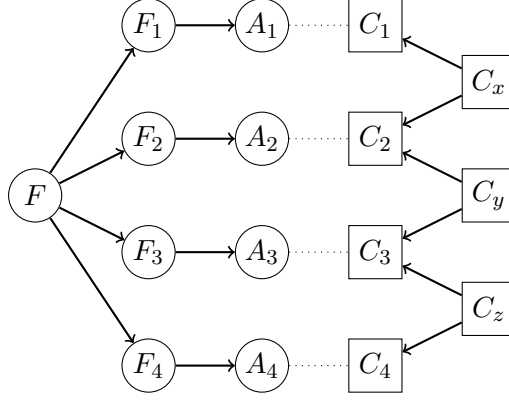


Figure 3: Troubleshooting with cost clusters. At the left side is Bayesian network with faults F_i and actions A_i . At the right side is the graph of cost clusters. To access, say, action A_2 , we have to open clusters C_y and C_2 (or C_x and C_2). In general, a cost cluster may contain more than one action.

we have to close the most recently open cluster whenever we need to check the outcome of troubleshooting actions. The cost $c(\mathcal{K}_i)$ is paid whenever we open $\mathcal{K}_i$ again. Troubleshooting cost clusters without inside information is *NP*-hard [Lín, 2011].

3 Hardness of Approximation

The results of this paper pertain to troubleshooting scenarios that do not satisfy the assumptions of *basic troubleshooting* listed in Section 2.1.1. In Section 3.1, we formally define four simple scenarios, each of them violating exactly one of the assumptions of *basic troubleshooting*. We proceed to prove hardness of approximation for each of these scenarios in Section 3.2.

Preliminaries We review some terminology and notation used later on. An introduction to the computational complexity theory can be found in standard textbooks such as [Garey and Johnson, 1979, Arora and Barak, 2009].

Let L be a minimization problem, let x be an instance of the problem L , and let A be an algorithm for problem L . By $A(x)$ we denote the objective value returned by algorithm A when applied to instance x . By $opt(x)$ we denote the optimum value of x , and by $|x|$ we denote the size of instance x . Given a function $\rho : \mathbb{N} \rightarrow \mathbb{R}$ with $\rho(n) > 1$ for all n , we say that algorithm A is a *polynomial $\rho(n)$ -approximation algorithm* if for all instances x of problem L we have $A(x) \leq \rho(|x|) \cdot opt(x)$, and the algorithm A operates in time polynomial in $|x|$.

We say that it is *NP*-hard to approximate problem L within factor $\rho(n)$, if there is a polynomial-time reduction ϕ from *3SAT* to L , such that ϕ combined with an hypothetical $\rho(n)$ -approximation algorithm for L would make it possible to decide *3SAT* in polynomial time. By *NP*-completeness of *3SAT*, this would imply $P=NP$. Equivalently, we say that problem L has no polynomial $\rho(n)$ -approximation algorithm unless $P=NP$.

For some problems encountered in this paper, ρ is just a constant. For another, we do not state the function ρ explicitly but only bound it using the ‘big- Ω ’ notation.

3.1 Statement of Results

We state the results first and postpone the proofs to Section 3.2.

3.1.1 Troubleshooting Scenarios without Questions

We formally define simple troubleshooting scenarios, each of them breaking one of the requirements of *basic troubleshooting* listed in Section 2.1.1. Each scenario isolates single property that makes it hard to approximate.

- Troubleshooting with dependent actions (Definition 1), breaking Assumption 3.
- Troubleshooting with multiple dependent faults (Definition 2), breaking Assumption 2.
- Troubleshooting with single fault, independent actions and cost clusters forming a DAG (Definition 3), breaking Assumption 4.

We discuss properties of the scenarios in further detail in the remarks after the definitions.

Definition 1 (Troubleshooting with dependent actions (*TSDA*)).

Input: A random variable F with values (*faults*) $f_1, \dots, f_n$, uniform probability distribution $\mathcal{P}(F)$, a set of *actions* $\{A_1 \dots, A_k\}$. Each action fixes a subset of faults $F(A_i) \subseteq \{f_1, \dots, f_n\}$ with certainty and no other faults. Each fault is fixed by at least one action.

Objective: Find a linear ordering of actions minimizing the expected cost of repair.

Remark. In troubleshooting with dependent actions, the Assumption 3 of *basic troubleshooting* is violated. This happens when the actions solve multiple faults, and some faults are solved by several actions.

Remark. In real situations, the probability distribution $\mathcal{P}(F)$ is not necessarily uniform and the actions do not fix faults with certainty, but may fail. This comment applies also to Definition 2 and 3.

Theorem 1. *The TSDA problem has no polynomial $(4 - \varepsilon)$ -approximation algorithm for any $\varepsilon > 0$ unless $P=NP$.*

Remark. Consider a greedy algorithm for troubleshooting with dependent faults described by Jensen et al. [2001]. The algorithm builds the action sequence by iteratively picking a previously unused action with the highest ratio $\frac{\mathcal{P}(A|\mathbf{e})}{c(A)}$, where $\mathcal{P}(A|\mathbf{e})$ is the probability that the action A fixes the fault given that all the preceding actions have failed. The algorithm is called *Updating P-over-C* in [Ottosen, 2012] because the probabilities $\mathcal{P}(A|\mathbf{e})$ of unused actions need to be updated in every step. Theorem 2.3 in [Kaplan et al., 2005] implies that the greedy algorithm is in fact a polynomial time 4-approximation algorithm for the following generalization of *TSDA*:

- The costs of actions are fixed but arbitrary.
- We take the single fault assumption, but the fault distribution $\mathcal{P}(F)$ is not necessarily uniform.
- The distributions $\mathcal{P}(A_i|F(A_i))$ are arbitrary except that the probability $\mathcal{P}(A_i = 1|F(A_i) = \mathbf{0})$ is zero.

The result stated in Theorem 1 is therefore tight.

Definition 2 (Troubleshooting with dependent faults (*TADF*)).

Input: A Bayesian network representing probability distribution $\mathcal{P}(\mathcal{F})$, binary random variables $F_1, \dots, F_n \in \mathcal{F}$ (*faults*), a set of *actions* $\{A_1 \dots, A_n\}$. For each fault, there is exactly one action that fixes it with certainty. Each action fixes just one fault.

Objective: Find a linear ordering π of actions that minimizes the *ECR*.

Remark. In troubleshooting with dependent faults, there can be multiple faults present in the system at the same time. That violates Assumption 2 of *basic troubleshooting*. If the faults occur independently, the problem is solvable in polynomial time [Srinivas, 1995]. If the faults do not occur independently, the problem is *NP*-hard [Vomlelová, 2003].

Theorem 2. *The TSDF problem has no polynomial $(4 - \varepsilon)$ -approximation algorithm for any $\varepsilon > 0$ unless $P=NP$.*

Remark. In Definition 2, there is no restriction on $\mathcal{P}(\mathcal{F})$ except that it is represented by a Bayesian network. Bayesian network inference is a hard problem in itself [Cooper, 1990]. In the proof of Theorem 2 we construct a Bayesian network for which the inference is easy and yet, the troubleshooting problem is hard.

Definition 3 (Troubleshooting with DAG cost clusters (*TSCC*)).

Input: A random variable F with values (*faults*) $f_1, \dots, f_n$, uniform probability distribution $\mathcal{P}(F)$, a set of *actions* $\{A_1, \dots, A_n\}$. For each fault, there is exactly one action that fixes it with certainty. Each action fixes just one fault. There is an acyclic directed graph (V, E) of cost clusters. Vertices $v \in V$ represent cost clusters and edges $u \rightarrow v$ show that the cluster v can be accessed from u . Each action A_i is assigned to exactly one cluster $v \in V$, and each cluster contains *zero or more* actions. The cost of opening cluster v is $c(v) \geq 0$.

Objective: Find a schedule of cluster opening and troubleshooting actions minimizing the expected cost of repair.

Remark. As discussed in Section 2.1.2, the Assumption 4 of *basic troubleshooting* is violated when there are cost clusters of actions. When the clusters are allowed to form a DAG, we get a hard problem. When the cost clusters form a tree, the problem is solvable in polynomial time [Ottosen and Jensen, 2010].

Theorem 3. *The TSCC problem has no polynomial $(4 - \varepsilon)$ -approximation algorithm for any $\varepsilon > 0$ unless $P=NP$. The result holds even when the cost cluster graph is bipartite.*

Theorem 4. *TSCC is NP-complete.*

3.1.2 Troubleshooting with Questions

As in Section 3.1.1, we formally define a simple scenario that captures the complexity of using questions in troubleshooting. In this case, the probability distribution on faults is not required to be uniform, but the actions and questions are deterministic.

Definition 4 (Troubleshooting with questions (*TSQ*)).

Input: A random variable F with values (*faults*) $f_1, \dots, f_n$, a probability distribution $\mathcal{P}(F)$, a set of *actions* $\{A_1, \dots, A_n\}$. For each fault, there is exactly one action that fixes it with certainty. There are m binary questions $Q_j : \{f_1, \dots, f_n\} \rightarrow \{0, 1\}$.

Objective: Find a troubleshooting strategy minimizing the expected cost of repair.

Remark. Troubleshooting with questions violates Assumption 5 of *basic troubleshooting*.

Remark. In realistic situations, we could have questions with more than two possible values. Also, the questions could be nondeterministic.

Theorem 5. *The TSQ problem has no polynomial $\Omega(\log n)$ -approximation algorithm, where n is the number of faults, unless $P=NP$. For the special case of TSQ with the probability distribution $\mathcal{P}(F)$ uniform, there is no polynomial $(4 - \varepsilon)$ -approximation algorithm for any $\varepsilon > 0$, unless $P=NP$.*

3.2 Proofs of Theorems

In all the proofs, the sets are finite, the random variables are discrete, and the probabilities are rational numbers.

3.2.1 Troubleshooting without Questions

The starting point of all the reductions in this section is the *Min-sum set cover* – a combinatorial problem that combines covering and sequencing. Easy reductions are possible since the probability distributions and costs considered in Definitions 1, 2, 3 are uniform.

Definition 5 (Min-sum set cover (*MSSC*)).

Input: A finite set U , a collection $\mathcal{C}$ of subsets of U , that is $\mathcal{C} \subseteq \{S : S \subseteq U\}$.

Objective: Find a linear ordering π of $\mathcal{C}$ minimizing the function

$$\sigma_{U,\mathcal{C}}(\pi) = \sum_{u \in U} i_\pi(u),$$

where $i_\pi(u)$ is the index of the first set $S \in \mathcal{C}$ covering element u under the ordering π .

Theorem 6 (Feige et al. [2004]). *MSSC has no polynomial $(4 - \varepsilon)$ -approximation algorithm for any $\varepsilon > 0$ unless $P=NP$.*

Remark. In the proofs of Theorems 1, 2, 3, we will consider only *MSCC* instances $(U, \mathcal{C})$ for which a set cover exists, that is $U = \bigcup_{S \in \mathcal{C}} S$. We can make such an assumption without a loss of generality, since the proof of Theorem 6 works with set systems for which set covers are guaranteed to exist [Feige et al., 2004].

For later use, we record two simple lemmas.

Lemma 1. *Consider an MSCC instance $(U, \mathcal{C})$ and an ordering π of $\mathcal{C}$. Denote by $U_{\pi(i)}$ the set of $u \in U$ first covered by the i -th set of π . Then*

$$\sigma_{U,\mathcal{C}}(\pi) = \sum_{i=1}^{|\mathcal{C}|} |U_{\pi(i)}| \cdot i. \quad (3)$$

Proof. Straight from Definition 5. □

Lemma 2. *Assume $U = \bigcup_{S \in \mathcal{C}} S$. Then $|U| \leq \sigma_{U,\mathcal{C}}(\pi)$ for any ordering π .*

Proof. A consequence of Lemma 1. □

In this section, we work with scenarios without questions and use Formula (2) for computation of the *ECR*. For a linear ordering π of actions $\{A_1, \dots, A_n\}$, we define

$$p_{\pi(i)} = \mathcal{P}\left(\bigcup_{j < i} \{A_{\pi(j)} = 0\} \cup \{A_{\pi(i)} = 1\}\right).$$

Formula (2) becomes

$$ECR(A_{\pi(1)}, \dots, A_{\pi(n)}) = \sum_{i=1}^n p_{\pi(i)} \cdot \sum_{j \leq i} c(A_{\pi(i)}). \quad (4)$$

Theorem 1. *The TSDA problem has no polynomial $(4 - \varepsilon)$ -approximation algorithm for any $\varepsilon > 0$ unless $P=NP$.*

Proof. The idea of the proof is to show that a special case of troubleshooting with dependent actions is equivalent to min-sum set cover.

An instance $(U, \mathcal{C})$ of the *MSCC* problem is reduced to an instance of *TSDA* as follows. There is a fault variable F with a set of values $\{f_u : u \in U\}$. Distribution $\mathcal{P}(F)$ is uniform. For each $S \in \mathcal{C}$ there is an action A_S . Action A_S fixes fault f_u with probability one if and only if $u \in S$. All the actions have unit cost. For the ease of notation, the actions are indexed by integers $1, \dots, k$, where $k = |\mathcal{C}|$. Given an arbitrary linear ordering $A_{\pi(1)}, \dots, A_{\pi(k)}$ of the actions, denote by $F_{\pi(i)}$ the set of faults first covered by the i -th action of the ordering. Using (4), we compute the expected cost of repair

$$ECR(A_{\pi(1)}, \dots, A_{\pi(k)}) = \sum_{i=1}^k p_{\pi(i)} \cdot i = \sum_{i=1}^k i \cdot |F_{\pi(i)}|/|U|.$$

From Lemma 1, we have that the *ECR* multiplied by $|U|$ is equal to $\sigma_{U, \mathcal{C}}(\pi)$. Therefore any approximation algorithm for *TSDA* could be used to approximate $(U, \mathcal{C})$ with the same approximation ratio. $\square$

Theorem 2. *The TSDF problem has no polynomial $(4 - \varepsilon)$ -approximation algorithm for any $\varepsilon > 0$ unless $P=NP$.*

Proof. We use an idea by Vomlelová [2003] to transform the *TSDA* instance constructed in the proof of Theorem 1 to an instance of *TSDF*. First, construct a Bayesian network with vertex set

$$\{F\} \cup \{F_u\}_{u \in U} \cup \{A_S\}_{S \in \mathcal{C}}$$

and edge set

$$\{F \rightarrow F_u\}_{u \in U} \cup \{F_u \rightarrow A_S\}_{u \in S}.$$

An example of such a network is shown in the left side of Figure 4. Variable F has states $\{f_u\}_{u \in U}$ and an uniform probability distribution. All the other variables have deterministic distributions of probability:

- The probability $\mathcal{P}(F_u = 1 | F)$ equals one if $F = f_u$, otherwise it equals zero.
- The probability $\mathcal{P}(A_S = 1 | \{F_u\}_{u \in S})$ equals one if at least one parent F_u of A_S has value 1, otherwise the probability equals zero.

We use the network to create an instance of the *TSDF* problem. Add to the network k new vertices A'_S and edges $A_S \rightarrow A'_S$ (the dotted part of Figure 4). The new vertices are *actions* of the *TSDF* instance, the original actions A_S are now *faults*. Cost of each new action is one. The optimal *ECR* of the original *TSDA* problem is the same as the optimal *ECR* of the constructed *TSDF* problem. $\square$

Theorem 3. *The TSCC problem has no polynomial $(4 - \varepsilon)$ -approximation algorithm for any $\varepsilon > 0$ unless $P=NP$. The result holds even when the cost cluster graph is bipartite.*

Proof. We again reduce min-sum set cover.

For each element $u \in U$, create a fault f_u with probability $\mathcal{P}(F = f_u) = 1/|U|$ and an action A_u , solving exclusively f_u . Each action is contained in an associated cost cluster, C_u . The cost of opening C_u and performing A_u equals one.

For each set $S \in \mathcal{C}$, create an empty cluster C_S with cost c (c is a large positive constant to be discussed later). Create directed edges from the C_S 's to the C_u 's according to set membership

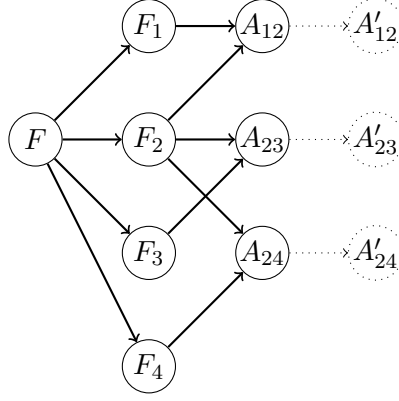


Figure 4: Model with dependent actions for $U = \{1, 2, 3, 4\}$ and $\mathcal{C} = \{\{1, 2\}, \{2, 3\}, \{2, 4\}\}$. The dotted edges and vertices show extension to a model with dependent faults.

– there is an edge $C_S \rightarrow C_u$ if and only if $S \ni u$. An example of a cost cluster model created this way is in Figure 3.

In any optimal schedule, each cluster C_u is opened right before performing A_u ; therefore, we shall not mention opening of the C_u 's in the rest of the proof. Any troubleshooting sequence has to contain all the actions A_u . Their order is arbitrary, since their costs and probabilities of success are uniform. Thus the *ECR* can be decomposed as a sum of the expected cost of actions and the expected cost of opening “top-level” clusters C_S . Assume the clusters $\{C_S\}_{S \in \mathcal{C}}$ are indexed by integers $1, \dots, k$ and are opened in sequence $C_1, \dots, C_k$. Using (4), we get

$$ECR = \underbrace{\sum_{i=1}^n \frac{i}{n}}_{\text{actions}} + \underbrace{\sum_{j=1}^k \mathcal{P}(C_j) \cdot j \cdot c}_{\text{top-level clusters}} = \frac{n+1}{2} + c \cdot \sum_{j=1}^k \mathcal{P}(C_j) \cdot j,$$

where $n = |U|$, $k = |\mathcal{C}|$ and $\mathcal{P}(C_j)$ is the probability that by opening C_j we make accessible an action that fixes the fault. In such a case, C_j is the last cluster of the sequence that needs to be open. We assume that once a cluster C_S is open, we perform all the actions accessible from C_S except for those that have already been performed. Indeed, if we did not perform the actions greedily after opening each cost cluster, the *ECR* would increase, because some of the cost clusters could be opened needlessly. With this assumption, $\mathcal{P}(C_j) = |F_{\pi(j)}|/n$, where $F_{\pi(j)}$ is the set of actions first made available by opening the j -th cluster. Let π be some ordering of $\mathcal{C}$ and let $\sigma_{U, \mathcal{C}}(\pi)$ be the value given by (3). Then there is a corresponding troubleshooting sequence specified by ordering π with

$$ECR(\pi) = \frac{n+1}{2} + c \cdot \frac{\sigma_{U, \mathcal{C}}(\pi)}{n}, \quad (5)$$

and the correspondence of *MSSC* solutions and *TSCC* solutions is one to one.

We conclude the proof by showing that for large values of c , the ratio $ECR(\pi)/ECR(\pi^*) \leq 4 - \varepsilon$ implies

$$\frac{\sigma_{U, \mathcal{C}}(\pi)}{\sigma_{U, \mathcal{C}}(\pi^*)} \leq 4 - \varepsilon. \quad (6)$$

By Theorem 6, this would imply $P=NP$. However, we have to make sure that the representation of c is not larger than a polynomial in n .

Let us denote any lower bound of $ECR(\pi^*)$ by $\underline{ECR}(\pi^*)$, and use (5) to express $\sigma_{U,C}$ as $(ECR(\pi) - \frac{n+1}{2}) \cdot \frac{n}{c}$. With a little algebra, one can rewrite (6) and verify that it is implied by

$$\frac{ECR(\pi)}{\underline{ECR}(\pi^*)} \leq 4 - \varepsilon - \frac{2(n+1)}{\underline{ECR}(\pi^*)}. \quad (7)$$

We set $c = (2k - \frac{1}{2})(n+1)$, $k > 0$, and use (5) and Lemma 2 to obtain $\underline{ECR}(\pi^*) = \frac{n+1}{2} + c = 2k(n+1)$. We use the $\underline{ECR}$ in inequality (7) and get the implication

$$\frac{ECR(\pi)}{\underline{ECR}(\pi^*)} \leq 4 - \varepsilon - \frac{1}{k} \implies \frac{\sigma_{U,C}(\pi)}{\sigma_{U,C}(\pi^*)} \leq 4 - \varepsilon.$$

Now we are almost done – all we need to show is that $\frac{1}{k}$ can be arbitrarily close to zero and yet, the number of bits needed to encode c as a binary number is polynomial in n . Let k equal $2^{\alpha(n)}$, where $\alpha(n)$ is an arbitrary polynomial in n , and let $|c|$ be the length of c in bits. We check that $|c|$ remains polynomial in n :

$$\begin{aligned} |c| &= \left\lceil \log_2 \left(2k - \frac{1}{2} \right) (n+1) \right\rceil \\ &= O(\log_2 k + \log_2 n) \\ &= O(\alpha(n)) \text{ when } k = 2^{\alpha(n)}. \end{aligned}$$

□

Proof of Theorem 4. NP -completeness is a concept defined for decision problems. Therefore, we have to consider the *decision variant* of $TSCC$: given an arbitrary positive constant K and an instance x of $TSCC$, is it true that $opt(x) \leq K$? This decision problem belongs to class NP – once we guess the strategy $s(x)$, it is easy to compute the ECR in polynomial time and check $ECR(s(x)) \leq K$. To show NP -hardness, we can use the same reduction as in the proof of Theorem 3 (ending with Equation 5). □

3.2.2 Troubleshooting with Questions

We reduce the *Decision tree* problem to TSQ (Definition 4).

Definition 6 (Binary decision tree (DT) [Garey and Johnson, 1979]).

Input: A set $\mathcal{E} = \{e_1, \dots, e_n\}$ of *entities* with a probability distribution $\mathcal{P}(\mathcal{E})$; we assume that all the probabilities are non-zero. A set $\mathcal{T} = \{T_1, \dots, T_m\}$ of functions $T_j : \mathcal{E} \rightarrow \{0, 1\}$ called *tests*.

Objective: Construct a decision tree for $\mathcal{E}$ using the tests in $\mathcal{T}$ with minimal weighted external path length (defined below).

A *decision tree* is a rooted binary tree with leaves labeled by $e_i \in \mathcal{E}$ and non-leaf vertices labeled by $T_j \in \mathcal{T}$. If an entity passes a test, $T_j(e_i) = 1$, it follows the right branch, otherwise it follows the left branch. It is assumed that for each pair of distinct entities e_r, e_s , there exists a test T_j with $T_j(e_r) = 1$ and $T_j(e_s) = 0$. Therefore, the tests can be used to correctly identify each entity, and we require that a path from the root of the decision tree to leaf uniquely determines the item e_i that labels the leaf.

Weighted external path length of tree $\mathbf{T}$ is $W(\mathbf{T}) = \sum_{i=1}^n \mathcal{P}(e_i) d(e_i)$, where $d(e_i)$ is the length of the path from the root of $\mathbf{T}$ to the leaf labeled by e_i .

The DT problem is known to be NP -hard [Hyafil and Rivest, 1976]. As for inapproximability, we have a recently proven theorem:

Theorem 7 (Chakaravarthy et al. [2011]). *The DT problem has no polynomial $\Omega(\log n)$ -approximation algorithm, where n is the number of entities in the input, unless $P=NP$. For the special case of DT with the probability distribution $\mathcal{P}(\mathcal{E})$ uniform, there is no polynomial $(4 - \varepsilon)$ -approximation algorithm for any $\varepsilon > 0$, unless $P=NP$.*

Troubleshooting with questions is at least as hard to approximate as DT:

Theorem 5. *The TSQ problem has no polynomial $\Omega(\log n)$ -approximation algorithm, where n is the number of faults, unless $P=NP$. For the special case of TSQ with the probability distribution $\mathcal{P}(F)$ uniform, there is no polynomial $(4 - \varepsilon)$ -approximation algorithm for any $\varepsilon > 0$, unless $P=NP$.*

Proof. We reduce DT to TSQ as follows:

- For each entity $e_i \in \mathcal{E}$, there is a corresponding fault f_i , $\mathcal{P}(f_i) = \mathcal{P}(e_i)$.
- There are questions $Q_1, \dots, Q_m$ corresponding to the tests, $\mathcal{P}(Q_j = 1 | f_i = 1) = T_j(e_i)$.
- The questions have unit cost.
- We take the single fault assumption, and for each fault f_i , there is exactly one perfect action A_i solving the fault with uniform cost c_A (a large enough constant to be specified later).

The idea of the reduction is to set the cost of action c_A high enough so that it is never profitable to perform an action before a fault is completely identified by the questions. By Lemma 3 below, a cost of action with this property is $c_A = 1 / \min_{e \in \mathcal{E}} \mathcal{P}(e)$. Note that the size of representation of c_A is not an issue here, since $\mathcal{P}(e)$ is part of the input parameters representing the DT problem. Using Lemma 3, we can restrict our attention to troubleshooting strategies that first identify the fault using a decision tree for $(\mathcal{E}, \mathcal{T})$ and perform a single action afterwards. For decision tree $\mathbf{T}$, the ECR of corresponding troubleshooting strategy is

$$ECR(\mathbf{T}) = W(\mathbf{T}) + c_A.$$

Unless $P = NP$, Theorem 7 implies that for any approximation algorithm, there will be input instances of the *Decision tree* problem with approximation ratio

$$\underbrace{\frac{W(\mathbf{T})}{W(\mathbf{T}^*)}}_{opt.} \geq r \cdot \log n$$

for some (fixed) constant r and large n . A little rearrangement of the above inequality shows that any approximation algorithm for TSQ will have approximation ratio $ECR(\mathbf{T})/ECR(\mathbf{T}^*) \geq r' \cdot \log n$, for some $r' < r$:

$$\begin{aligned} W(\mathbf{T}) + c_A &\geq W(\mathbf{T}^*) \cdot r \cdot \log n \\ \frac{W(\mathbf{T}) + c_A}{W(\mathbf{T}^*) + c_A} &\geq \frac{W(\mathbf{T}^*)}{W(\mathbf{T}^*) + c_A} \cdot r \cdot \log n = \frac{1}{1 + \frac{c_A}{W(\mathbf{T}^*)}} \cdot r \cdot \log n \\ \frac{ECR(\mathbf{T})}{ECR(\mathbf{T}^*)} &\geq \frac{1}{1 + c_A} \cdot r \cdot \log n, \text{ since } W(\mathbf{T}^*) \geq 1. \end{aligned}$$

□

The proof of Theorem 5 relies on Lemma 3.

Lemma 3. *Consider the instance of TSQ constructed in the proof of Theorem 5 above, and denote by $\mathbf{e}$ the evidence at any particular step of a troubleshooting strategy. Then:*

- *When there is an action A with probability of success $0 < \mathcal{P}(A = 1|\mathbf{e}) < 1$, there is also at least one question Q with probability $0 < \mathcal{P}(Q = 1|\mathbf{e}) < 1$.*
- *Moreover, if the uniform cost of action is $c_A = 1/\min_{i=1}^n \mathcal{P}(f_i)$, then performing the question Q immediately before the action A leads to a strategy with lower expected cost than performing A immediately before Q .*

Proof. The reduction from the DT problem to TSQ ensures that when there is an action A with the probability of success $\mathcal{P}(A = 1|\mathbf{e}) < 1$, then:

- There are at least two distinct faults f_i and f_j , $i \neq j$, with nonzero probability.
- Action A solves exactly one of the faults f_i and f_j .
- There is a question Q that can “distinguish” between the two faults, that is $\mathcal{P}(Q = 1|\mathbf{e}, f_i)$ is either 0 or 1, and $\mathcal{P}(Q = 1|\mathbf{e}, f_j)$ equals $1 - \mathcal{P}(Q = 1|\mathbf{e}, f_i)$.

We want to show that it is always better to perform Q before A . Consider two strategies:

- Strategy $\mathbf{S}_1$ performs action A first, and if it fails, it performs question Q .
- Strategy $\mathbf{S}_2$ performs Q first and then it performs A in one of its branches.

The two strategies are shown in Figure 5. Since action A addresses just one fault, there are two cases to consider. Either

- $\mathcal{P}(A = 1, Q = 1|\mathbf{e}) = 0$, or
- $\mathcal{P}(A = 1, Q = 0|\mathbf{e}) = 0$.

In case a), strategy $\mathbf{S}_2$ schedules the action A in the 0-branch emanating from Q as shown at the right hand side of Figure 5. In case b), strategy $\mathbf{S}_2$ schedules the action A in the 1-branch. In the rest of the proof, we consider case a), but case b) is symmetric. We denote the cost of Q by c_Q , and the sub-trees of strategies by $\mathbf{t}_0$ and $\mathbf{t}_1$. We use the notation introduced in Section 2: For a leaf node ℓ , we denote by $\mathbf{e}_\ell$ the associated evidence. By $t(\ell)$ we denote the cost of reaching ℓ from the root of $\mathbf{t}_0$ (or $\mathbf{t}_1$). The expected costs of the two strategies $\mathbf{S}_1$ and $\mathbf{S}_2$ are

$$\begin{aligned}
ECR(\mathbf{S}_1|\mathbf{e}) &= \mathcal{P}(A = 1|\mathbf{e}) \cdot c_A \\
&\quad + \sum_{\ell \in \mathcal{L}(\mathbf{t}_1)} \mathcal{P}(\mathbf{e}_\ell, A = 0, Q = 1|\mathbf{e}) \cdot [c_A + c_Q + t(\ell)] \\
&\quad + \sum_{\ell \in \mathcal{L}(\mathbf{t}_0)} \mathcal{P}(\mathbf{e}_\ell, A = 0, Q = 0|\mathbf{e}) \cdot [c_A + c_Q + t(\ell)], \\
ECR(\mathbf{S}_2|\mathbf{e}) &= \sum_{\ell \in \mathcal{L}(\mathbf{t}_1)} \mathcal{P}(\mathbf{e}_\ell, Q = 1|\mathbf{e}) \cdot [c_Q + t(\ell)] \\
&\quad + \mathcal{P}(Q = 0, A = 1|\mathbf{e}) \cdot [c_Q + c_A] \\
&\quad + \sum_{\ell \in \mathcal{L}(\mathbf{t}_0)} \mathcal{P}(\mathbf{e}_\ell, A = 0, Q = 0|\mathbf{e}) \cdot [c_A + c_Q + t(\ell)].
\end{aligned}$$

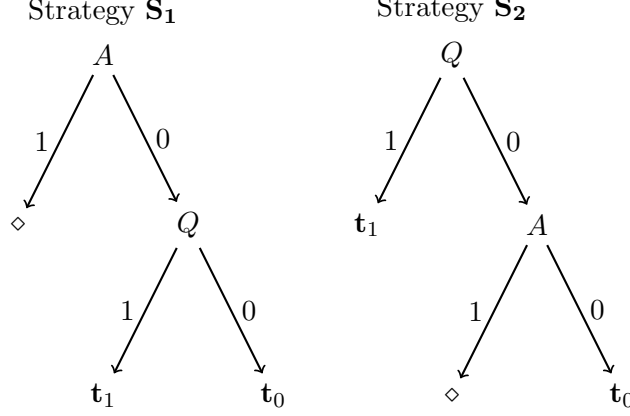


Figure 5: The two strategies from the proof of Lemma 3. Strategy $\mathbf{S}_2$ is constructed from strategy $\mathbf{S}_1$ by interchanging action A and question Q .

To have strategy $\mathbf{S}_2$ more efficient than strategy $\mathbf{S}_1$, we need $ECR(\mathbf{S}_2|\mathbf{e}) - ECR(\mathbf{S}_1|\mathbf{e}) \leq 0$ to hold. Since the probability $\mathcal{P}(A = 1, Q = 1|\mathbf{e})$ is zero, most of the terms conveniently cancel out when we perform the subtraction:

$$\begin{aligned}
0 &\geq ECR(\mathbf{S}_2|\mathbf{e}) - ECR(\mathbf{S}_1|\mathbf{e}) \\
0 &\geq c_A \cdot \underbrace{\left[\mathcal{P}(Q = 0, A = 1|\mathbf{e}) - \mathcal{P}(A = 1|\mathbf{e}) \right]}_{\mathcal{P}(A=1, Q=1|\mathbf{e})=0} \\
&\quad + c_Q \cdot \underbrace{\mathcal{P}(Q = 0, A = 1|\mathbf{e})}_{\mathcal{P}(A=1|\mathbf{e})} \\
&\quad + \sum_{\ell \in \mathcal{L}(\mathbf{t}_1)} \underbrace{\left[\mathcal{P}(\mathbf{e}_\ell, Q = 1|\mathbf{e}) - \mathcal{P}(\mathbf{e}_\ell, A = 0, Q = 1|\mathbf{e}) \right]}_{\mathcal{P}(\mathbf{e}_\ell, A=1, Q=1|\mathbf{e})=0} \cdot (c_Q + t(\ell)) \\
&\quad - c_A \cdot \underbrace{\sum_{\ell \in \mathcal{L}(\mathbf{t}_1)} \mathcal{P}(\mathbf{e}_\ell, A = 0, Q = 1|\mathbf{e})}_{\mathcal{P}(Q=1|\mathbf{e})} \\
0 &\geq c_Q \cdot \mathcal{P}(A = 1|\mathbf{e}) - c_A \cdot \mathcal{P}(Q = 1|\mathbf{e}) \tag{8}
\end{aligned}$$

To finish the proof, we claim that the value $c_A = 1/\min_{i=1}^n \mathcal{P}(f_i)$ satisfies inequality (8) since:

- As we have argued, $\mathcal{P}(Q = 1|\mathbf{e}) \geq 0$. By the construction in the proof of Theorem 5, we have $\mathcal{P}(Q = 1|\mathbf{e}) \geq \min_{i=1}^n \mathcal{P}(f_i)$.
- By the construction in the proof of Theorem 5, we have also $c_Q = 1$.
- We assume $\mathcal{P}(A = 1|\mathbf{e}) < 1$.

□

4 Summary and Discussion

The results are summarized in Table 1. As discussed in Section 3.1.1, the result for troubleshooting with dependent actions is tight for a restricted, but relevant variant of the problem. For the

other scenarios, no approximation algorithms have been designed so far. Therefore the results reported might not be tight.

Table 1: Summary of results

<i>Troubleshooting scenario</i>	<i>Hard to approximate within</i>
Dependent actions (<i>TSDA</i>)	$4 - \varepsilon$ for all $\varepsilon > 0$
Dependent faults (<i>TSDF</i>)	$4 - \varepsilon$ for all $\varepsilon > 0$
DAG Cost clusters (<i>TSCC</i>)	$4 - \varepsilon$ for all $\varepsilon > 0$
Questions (<i>TSQ</i>)	$\Omega(\log n)$

As we have shown in Section 3.2.1, the *min-sum set cover* problem [Feige et al., 2004] is equivalent to a special case of troubleshooting with dependent actions. A generalized variant of *min-sum set cover* is studied under the name *pipelined set cover* by Munagala et al. [2005]. There, the sets (corresponding to faults) have associated weights (corresponding to probabilities of faults), and the elements (corresponding to repair actions) have associated costs. The problem is further generalized by Kaplan et al. [2005]. All three papers [Feige et al., 2004, Munagala et al., 2005, Kaplan et al., 2005] provide insights and results that are directly applicable to the greedy algorithm *Updating P-over-C* [Jensen et al., 2001] discussed in this paper in Section 3.1.

Problems solvable in polynomial time A special case of troubleshooting with questions is implicitly addressed already by Johnson [1956]. He gives an algorithm that runs in $O(n \log n)$ time and is optimal under reasonable assumptions. Likewise, a very restricted case of troubleshooting with dependent actions is solvable by graph matching [Vomlelová and Vomlel, 2003] in $O(n\sqrt{m})$ time [Micali and Vazirani, 1980], where m is the number of faults and n is the number of actions. Identification of interesting special cases solvable in polynomial time is an open research area.

References

- Sanjeev Arora and Boaz Barak. *Computational Complexity - A Modern Approach*. Cambridge University Press, 2009. ISBN 978-0-521-42426-4.
- Richard E. Bellman. *Dynamic Programming*. Princeton University Press, Princeton, NJ, 1957.
- John S. Breese and David Heckerman. Decision-theoretic Troubleshooting: A framework for repair and experiment. In Eric Horvitz and Finn Verner Jensen, editors, *UAI*, pages 124–132. Morgan Kaufmann, 1996. ISBN 1-55860-412-X.
- Venkatesan T. Chakaravarthy, Vinayaka Pandit, Sambuddha Roy, Pranjal Awasthi, and Mukesh K. Mohania. Decision trees for entity identification: Approximation algorithms and hardness results. *ACM Trans. Algorithms*, 7(2):15:1–15:22, March 2011. ISSN 1549-6325.
- Gregory F Cooper. The computational complexity of probabilistic inference using bayesian belief networks. *Artificial intelligence*, 42(2):393–405, 1990.
- Uriel Feige, László Lovász, and Prasad Tetali. Approximating Min Sum Set Cover. *Algorithmica*, 40(4):219–234, 2004.
- Michael R. Garey and David S. Johnson. *Computers and Intractability: A Guide to the Theory of NP-Completeness*. W. H. Freeman, 1979. ISBN 0-7167-1044-7.

- Brian Gluss. An optimum policy for detecting a fault in a complex system. *Operations Research*, 7(4):468–477, 1959.
- Korhan Gökçay and Taner Bilgiç. Troubleshooting using probabilistic networks and value of information. *International journal of approximate reasoning*, 29(2):107–133, 2002.
- Laurent Hyafil and Ronald L. Rivest. Constructing Optimal Decision Trees is NP-Complete. *Information Processing Letters*, 5(1), 1976.
- Finn Verner Jensen, Uffe Kjærulff, Brian Kristiansen, Helge Langseth, Claus Skaanning, Jiří Vomlel, and Marta Vomlelová. The SACSO methodology for troubleshooting complex systems. *AI EDAM*, 15(4):321–333, 2001.
- Selmer M. Johnson. *Optimal Sequential Testing*. Number RM1652. Rand Corporation, 1956.
- Haim Kaplan, Eyal Kushilevitz, and Yishay Mansour. Learning with attribute costs. In *Proceedings of the thirty-seventh annual ACM symposium on Theory of computing*, pages 356–365. ACM, 2005.
- Helge Langseth and Finn Verner Jensen. Heuristics for two extensions of Basic Troubleshooting. In Henrik Hautop Lund, Brian H. Mayoh, and John W. Perram, editors, *SCAI*, volume 66 of *Frontiers in Artificial Intelligence and Applications*, pages 80–89. IOS Press, 2001. ISBN 1-58603-161-9.
- Václav Lín. Extensions of Decision-theoretic Troubleshooting: Cost clusters and precedence constraints. In Weiru Liu, editor, *ECSQARU*, volume 6717 of *Lecture Notes in Computer Science*, pages 206–216. Springer, 2011. ISBN 978-3-642-22151-4.
- Silvio Micali and Vijay V Vazirani. An $O(\sqrt{|V|} \cdot |E|)$ algorithm for finding maximum matching in general graphs. In *Foundations of Computer Science, 1980., 21st Annual Symposium on*, pages 17–27. IEEE, 1980.
- Kamesh Munagala, Shivnath Babu, Rajeev Motwani, and Jennifer Widom. The pipelined set cover problem. In Thomas Eiter and Leonid Libkin, editors, *ICDT*, volume 3363 of *Lecture Notes in Computer Science*, pages 83–98. Springer, 2005. ISBN 3-540-24288-0.
- Thorsten J. Ottosen. *Solutions and Heuristics for Troubleshooting with Dependent Actions and Conditional Costs (PhD thesis)*. Aalborg University, Denmark, 2012.
- Thorsten J. Ottosen and Finn V. Jensen. The cost of troubleshooting cost clusters with inside information. In Peter Grünwald and Peter Spirtes, editors, *UAI*, pages 409–416. AUAI Press, 2010. ISBN 978-0-9749039-6-5.
- Wayne E. Smith. Various optimizers for single-stage production. *Naval Research Logistics Quarterly*, 3(1-2):59–66, 1956. ISSN 1931-9193.
- Sampath Srinivas. A polynomial algorithm for computing the optimal repair strategy in a system with independent component failures. In Philippe Besnard and Steve Hanks, editors, *UAI*, pages 515–522. Morgan Kaufmann, 1995. ISBN 1-55860-385-9.
- Marta Vomlelová. Complexity of Decision-theoretic Troubleshooting. *Int. J. Intell. Syst.*, 18(2):267–277, 2003.
- Marta Vomlelová and Jiří Vomlel. Troubleshooting: NP-hardness and solution methods. *Soft Comput.*, 7(5):357–368, 2003.